


DESCRIPTION

1BF07 SDI M TO SDI MINI BNC M SLIM CABLE

SDI M to SDI 1.0/2.3 Mini BNC M cable is made of slim SDI Cable , the cable supports 12G Signals . The cable supports connection between normal BNC to 1.0/2.3 Mini BNC devices . BNC Connector and 1.0/2.3 Mini BNC Connectors are made of Brass and teflon material . The connectors are nickel coated and pin is gold plated . The connectors and cables are 75 ohms and supports up to 12 G Signals and resolutions up to 4k 60 Hz . The connectors are machine crimped to the cable . The coaxial cable conductor is 23 awg and shielding is 95% coverage for the best performance . Colour : Black . Available Length 1 - 10 Mtrs .

SDI M TO SDI MINI BNC M SLIM CABLE

nT 01BF07

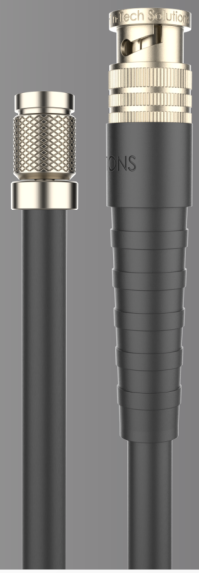


Specification

Connector A	:	BNC M Connector
Housing	:	Brass + PVC Strain relief
Coating	:	Nickel /Gold
Connector B	:	1.0/2.3 Mini BNC M Connector
Housing	:	Brass + PVC Strain relief
Coating	:	Gold
Connection Type	:	Machine C Crimping
Cable	:	Coaxial Cable
Ohms	:	75
Resolution	:	4k 60 Hz
Speed	:	12 G
Center Conductor	:	Copper 23 AWG
Shield	:	95 % Tin Coated Copper
Colour	:	Black
Length Available	:	1 - 10 Mtrs

Supports 4K 60 Hz resolutions

Speed 12 G



Machine Crimped 1.0/2.3 Mini BNC M Connector with strain relief

Webpage

Youtube

